

STAR

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x6 MOD. TRANSP. WINDOW

Reference:
CSP6PT

Characteristics:

Product type:	IP65 Boxes for industrial sockets
Exterior dimensions (Height x Width x Depth):	436x142x137 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	1x6 DIN rail
Installation:	Surface
Color:	Grey RAL 7035
Window:	Transparent tinted window
Weight (Kg):	1,08
Cable entry:	Top: 2xM20 - 1xM40. Bottom: 2xM20 - 1xM40. Oblong rear: 2xOB25x25
Components:	-
Materials:	Halogen-free plastic materials. Frame and base: PC. Transparent window: UV protection polycarbonate

Technical data:

Degree of protection:	IP65
Resistance to impact:	IK08
Glow wire resistance:	750 °C
Ball pressure test:	70 °C
Ambient temperature range:	-25 °C / +40 °C
Maximum operating voltage:	1000 V AC / 1500 V DC
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	UNE-EN 62208 and UNE-EN 61439-1 (as applicable)
Certificates:	



Codes:


EAN:	8431044242231
Customs tariff number:	85.38.10.00
ETIM 6.0:	EC000379

STAR

IP65 BOXES FOR INDUSTRIAL SOCKETS

Description: IP65 SURFACE BOX 1x6 MOD. TRANSP. WINDOW

Reference: CSP6PT

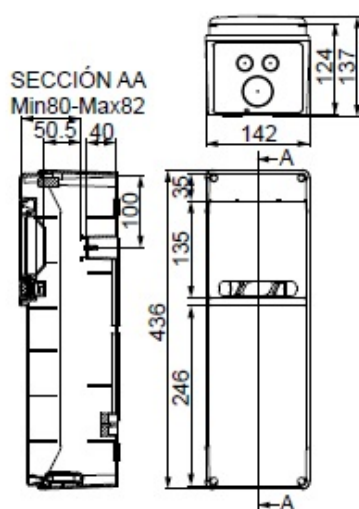

Exterior dimensions (Height x Width x Depth):

436x142x137 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 6

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.